

### Product Data Sheet



- MOSFET Output
- Low Impedance
- 4-32VDC Control Input
- Load Current: 10A-50A
- Internal Over-voltage Protection
- LED Indicator
- RoHS Compliant

### Product Description

The SJM series industrial single phase relay with MOSFET output is widely used in industrial applications. The relay can be used for resistive, inductive, or capacitive load, and features low impedance. The control voltage range is 4-32VDC, and the relay has internal over-voltage protection. The load current can be rated at 10A, 20A, or up to 50A, depending on the specific model

### Product Selection

MSR	-	SJM	50	D	40	W	-L	Q
	Packing -: Bulk Packaging Y: Individual	MSR- SJM Series	Load Voltage 30: 30VDC 50: 50VDC 60: 60VDC 100: 100VDC 200: 200VDC	Control Voltage D: DC Control	Load Current 10: 10 Amp 20: 20 Amp 40: 40 Amp 50: 50 Amp	Control Voltage W: 4-32VDC	LED Indication Blank: Without LED L: With LED	Terminal Type Blank: Screw Q: Quick Connection

PART NUMBERS ARE AS FOLLOWS					
	30VDC	50VDC	60VDC	100VDC	200VDC
10A			MSR-SJM60D10W-L		MSR-SJM200D10W-L
20A			MSR-SJM60D20W-L	MSR-SJM100D20W-L	
40A		MSR-SJM50D40W-L			
50A	MSR-SJM30D50W-L				

### Product Data Sheet

## Technical Specification

#### INPUT CIRCUIT (Ta=25°C)

Control Voltage Range	4-32VDC
Must Turn-On Voltage	4VDC
Must Turn-Off Voltage	1VDC
Maximum Input Current	25mA@32VDC
Maximum Transient Overvoltage	32VDC

#### OUTPUT CIRCUIT (Ta=25°C)

Ordering Information	MSR-SJM30D50W-L	MSR-SJM50D40W-L	MSR-SJM60D10W-L	MSR-SJM60D20W-L	MSR-SJM100D20W-L	MSR-SJM200D10W-L
Transistor Voltage (VDC)	55	75	100	100	150	250
Load Voltage Range (VDC)	0-24	0-36	0-48	0-48	0-75	0-120
TVS Breakdown Voltage Scope (V)	37.1-41	53.2-58.8	64.6-71.4	64.6-71.4	105-116	190-210
Maximum Load Current (A)	50	40	10	20	20	10
Maximum Surge Current (Apk.@10ms)	150	120	30	30	60	30
Maximum On-State Resistance (mΩ)	4.2	12	14	14	13	60
Maximum Off-State Leakage Current @Rated Load Voltage (mA)	0.1					
Minimum Load Current (mA)	2					
Maximum Turn-on Time (ms)	0.3					
Maximum Turn-off Time (ms)	0.3					

#### General Specifications (Ta=25°C)


Dielectric Strength (50/60Hz)	Input/Output	2500Vrms
	Input, output/Base	2000Vrms
Minimum Insulation Resistance (@500VDC)	1000MΩ	
Ambient Temperature Range	-30°C ~ +80°C	
Storage Temperature Range	-30°C ~ +100°C	
Weight (Typical)	35g	

## Product Data Sheet


### Application Note:

Control heating, DC power supplies, electromechanical valves, motors, medical equipment, etc.


### Outline Dimensions/ Wiring Diagram

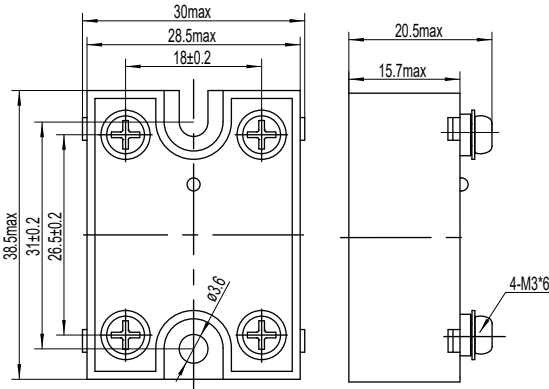

Typical

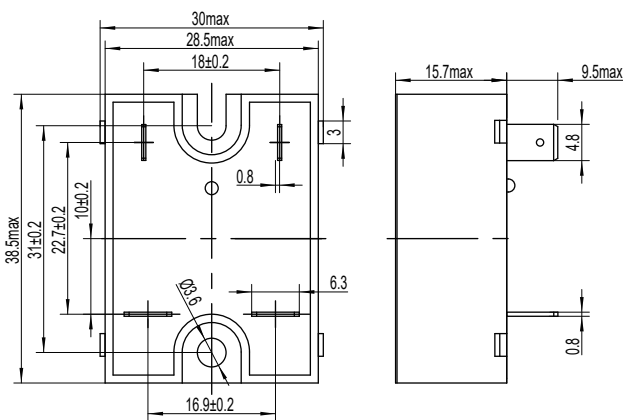

With Quick Connector  
Suffix with (-Q)






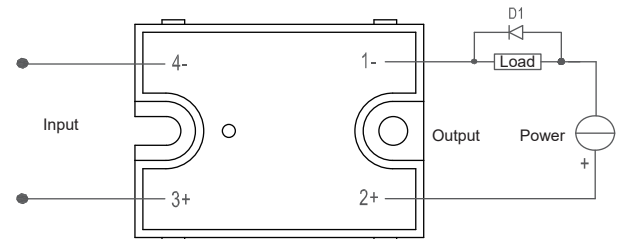


Wiring Diagram

When the relay is used for inductive load control, please be sure to use a suppression circuit, just like the drawing above. Both load terminals are inverse paralleled with a fly-wheel diode D1.

D1: Fast Recovery Diode

### Thermal Curve

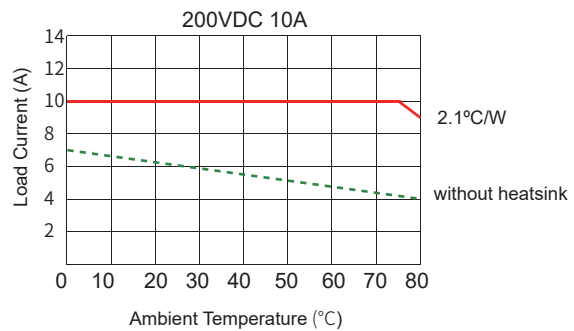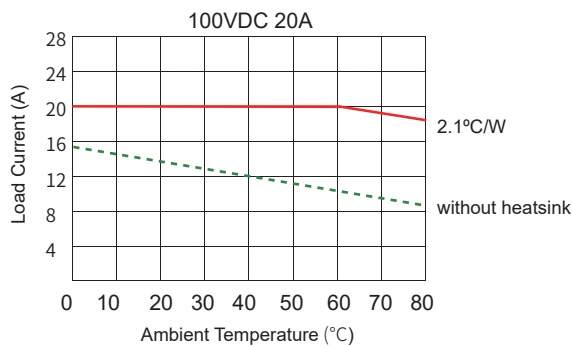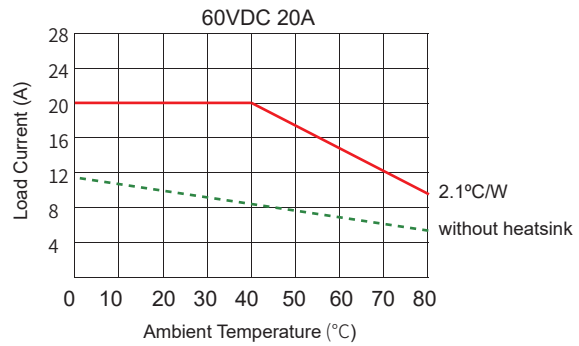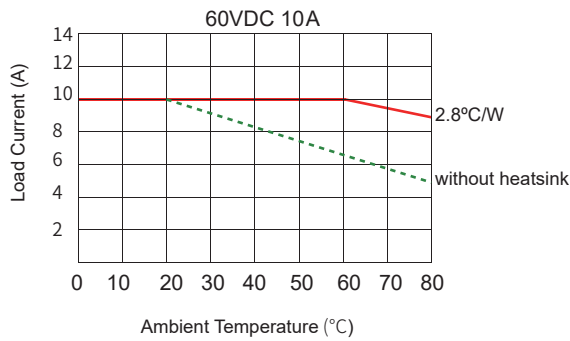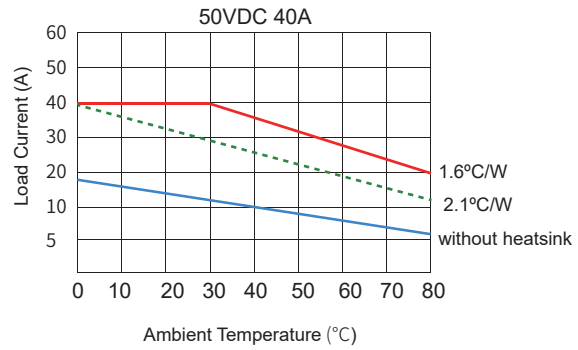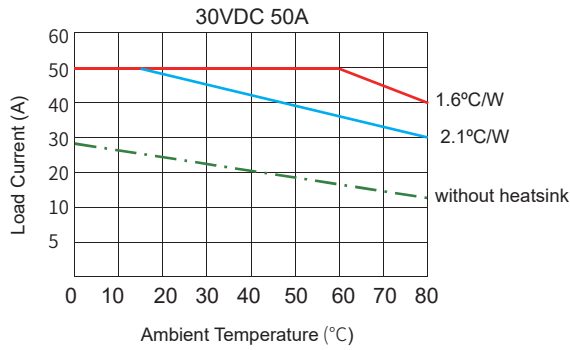

### Important Notice

1. Relay must be mounted to proper sized heat sink based on thermal curves. Thermal grease or a thermal pad must be used between relay and heat sink and be torqued down to (13-15)/(1.5-1.7) in-lb/Nm.
2. When connection wiring to SSR, please ensure screws are torqued down properly. Recommended torque for input screw is (13-15)/(1.5-1.7) in-lb/Nm, output screw is (13-15)/(1.5-1.7) in-lb/Nm.
3. SSR's carrying load capacity is related to the operation ambient temperature and heat dissipation condition, please refer to the Thermal Derating Curve for derating.
4. Capacitive load will produce very high surge current at the moment of conduction, which may lead to the damage of solid state relay due to the excessive surge current. Therefore, if the actual load is capacitive, or the load has paralleled large capacitance, it is strongly recommended that NTC should be connected in series in the load loop to suppress surge current in order to avoid damage to the product.

### Product Certification

