

Product Data Sheet

Disconnects - Metallic

- ✓ Non-Fused Pullout
- ✓ Rated NEMA 3R for outdoor use
- ✓ Line, load, and ground terminals aligned for easy hook up with heavy wires
- ✓ Full dead front
- ✓ Knockouts accommodate three sizes (1/2", 3/4", and 1")
- ✓ Rear, bottom and side entry knockouts
- ✓ Heavy gage steel case
- ✓ Large internal wiring space
- ✓ Individually wrapped in boxes of 6
- ✓ Folding pivot locking tab
- ✓ UL approved

Part No.	Description
MKFYDNS60	AC Disconnect - Metal 60A Non-Fused Pullout
MKFYDFS30	AC Disconnect - Metal 30A Fused Pullout
MKFYDFS60	AC Disconnect - Metal 60A Fused Pullout



Disconnects - Non-metallic

- ✓ Amperage Rating: 30 and 60A
- ✓ Rated NEMA 3R for outdoor use
- ✓ Non-fused pullout
- ✓ Standard 1/4" head screw on dead front
- ✓ Great for salt air regions
- ✓ Plastic non-metallic enclosures have a single unit door and protective shield for installer convenience
- ✓ Plastic non-metallic enclosures are durable and provide excellent weather resistance
- ✓ Rear, bottom and side entry knockouts
- ✓ Individually wrapped in boxes of 6
- ✓ UL approved

Part No.	Description
MKFYDNP60	AC Disconnect - Plastic 60A Non-Fused Pullout
MKFYDFP30	AC Disconnect - Plastic 30A Fused Pullout
MKFYDFP60	AC Disconnect - Plastic 60A Fused Pullout



Ordering Number:

MKF - D F P 60

Pack Code:  
- = Normal factory bulk packaging  
Y = Individual box packaging  
A through ZZ = Customer Identification

Style:  
D: With Enclosure


Protection:  
F = Fused  
N = Non-Fused

Enclosure Material:  
P = Plastic  
M = Metal


Current Rating:  
30 = 30 Amps  
60 = 60 Amps

Product Data Sheet

Outline Drawings :  
Disconnects - Fused Non-metallic

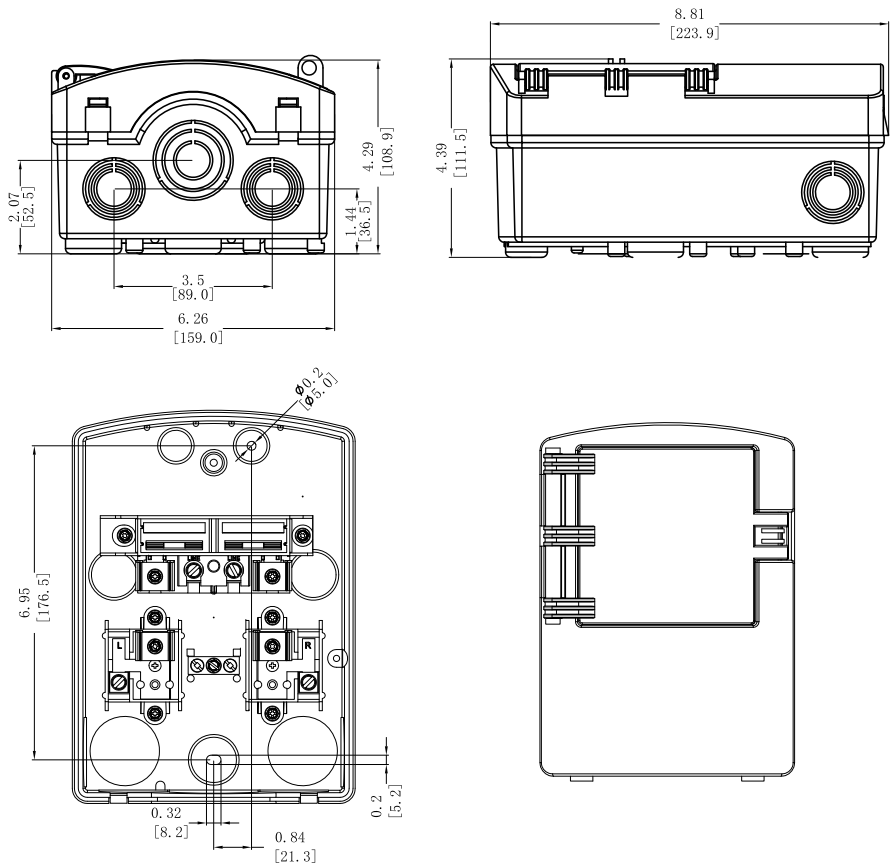


Disconnects - Non fused Non metallic

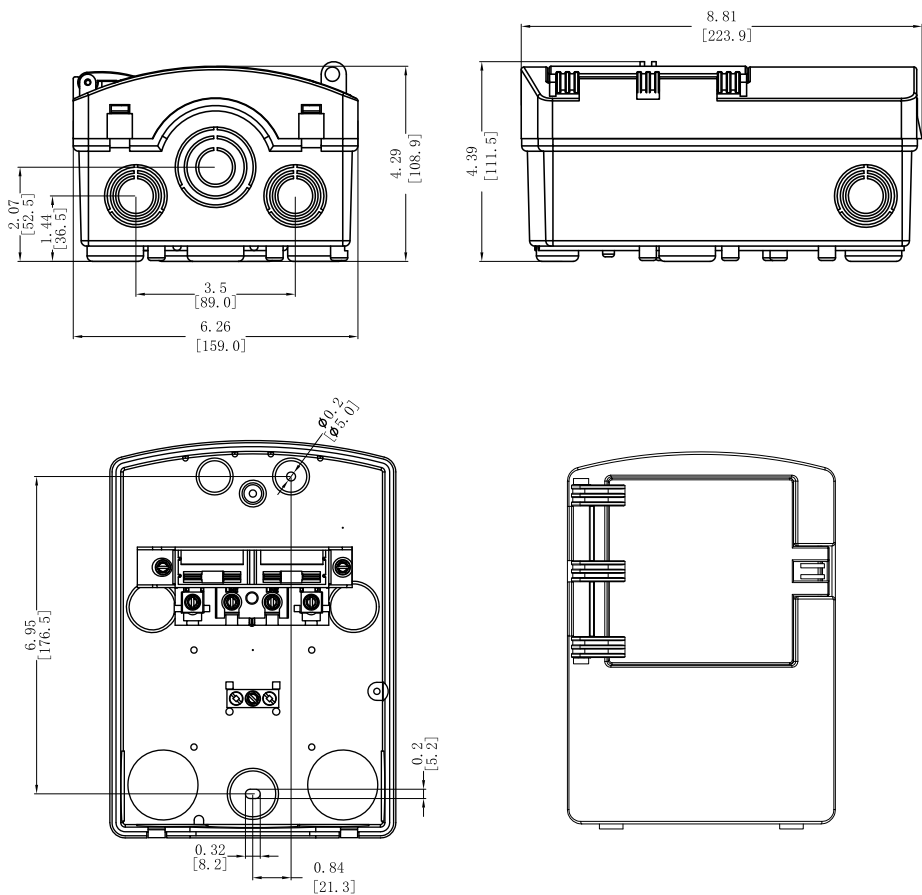

Product Data Sheet

Outline Drawings :  
Disconnects - Fused Metallic

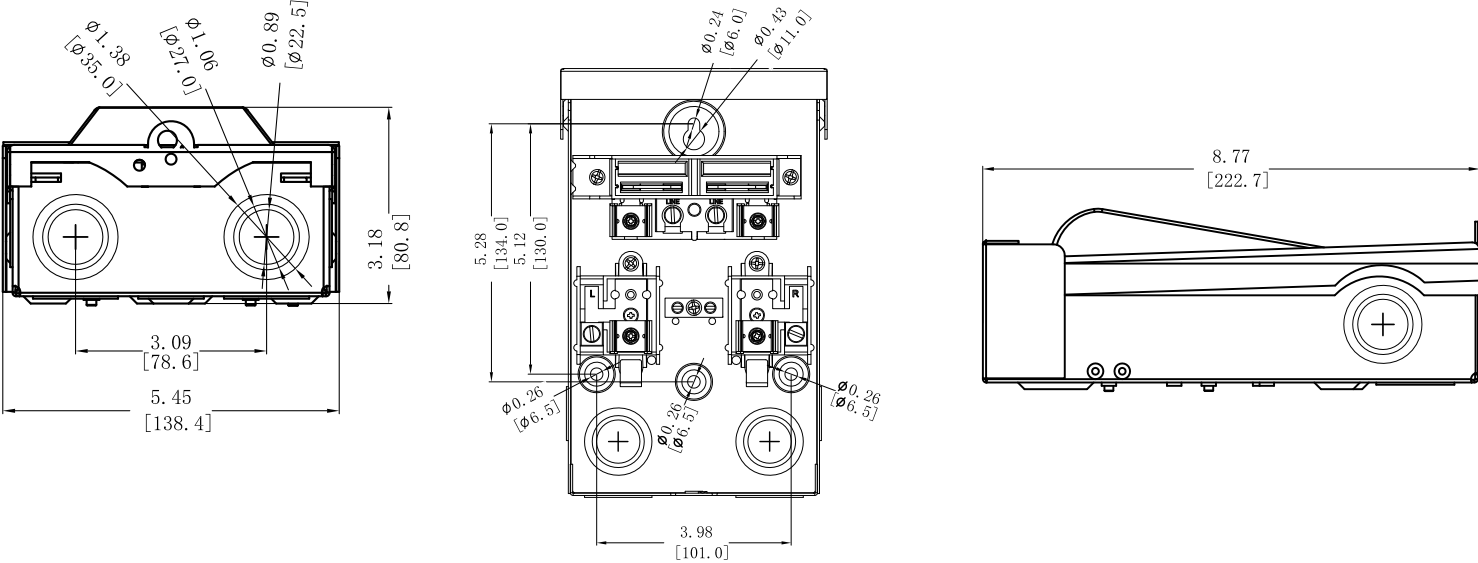

Disconnects - Non-Fused Metallic

