

Product Data Sheet

Disconnects - Metallic

- ✓ Non-Fused Pullout
- ✓ Rated NEMA 3R for outdoor use
- ✓ Line, load, and ground terminals aligned for easy hook up with heavy wires
- ✓ Full dead front
- ✓ Knockouts accommodate three sizes (1/2", 3/4", and 1")
- ✓ Rear, bottom and side entry knockouts
- ✓ Heavy gage steel case
- ✓ Large internal wiring space
- ✓ Individually wrapped in boxes of 6
- ✓ Folding pivot locking tab
- ✓ UL approved



Disconnects - Non-metallic

- ✓ Amperage Rating: 30 and 60A
- ✓ Rated NEMA 3R for outdoor use
- ✓ Non-fused pullout
- ✓ Standard 1/4" head screw on dead front
- ✓ Great for salt air regions
- ✓ Plastic non-metallic enclosures have a single unit door and protective shield for installer convenience
- ✓ Plastic non-metallic enclosures are durable and provide excellent weather resistance
- ✓ Rear, bottom and side entry knockouts
- ✓ Individually wrapped in boxes of 6
- ✓ UL approved



Ordering Number:

MDS - D F P 60 S

Pack Code:

- = Normal factory bulk packaging
- Y = Individual box packaging
- A through ZZ = Customer Identification

Style:

D: With Enclosure

Protection:

- F = Fused
- N = Non-Fused

Enclosure Material:

- S = Metallic
- P = Plastic (Non-Metallic)

Current Rating:


- 30 = 30 Amps
- 60 = 60 Amps

Option Code:


- S = Side Door Open (For Metallic enclosure only)

Product Data Sheet

Outline Drawings :
Disconnects - Fused Non-metallic

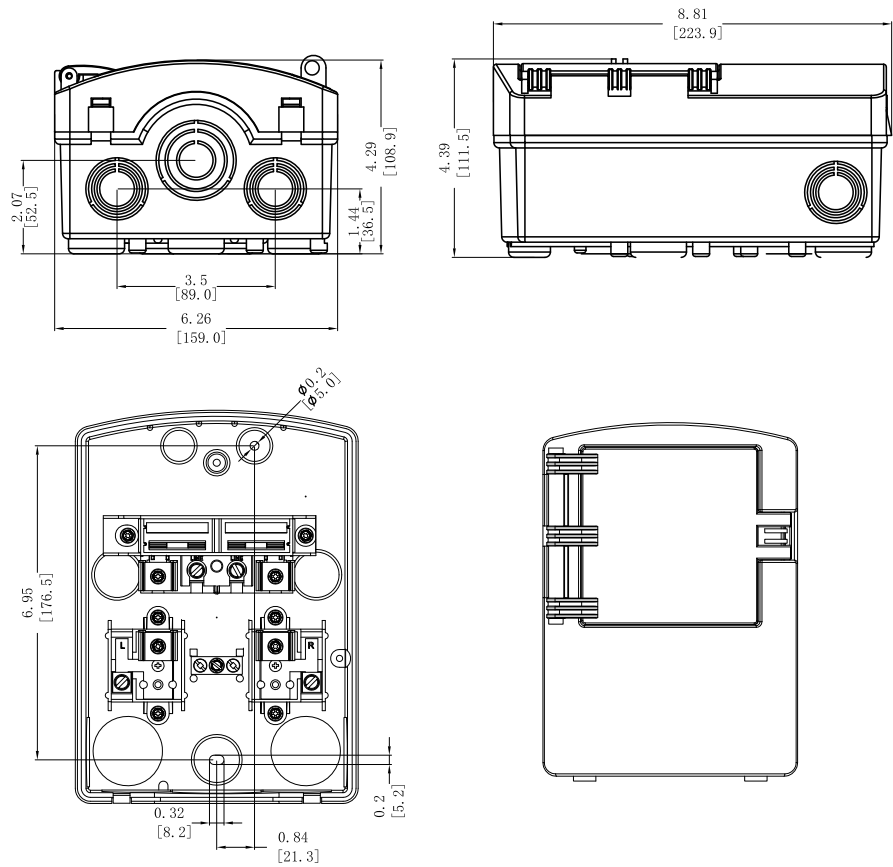


Disconnects - Non fused Non metallic

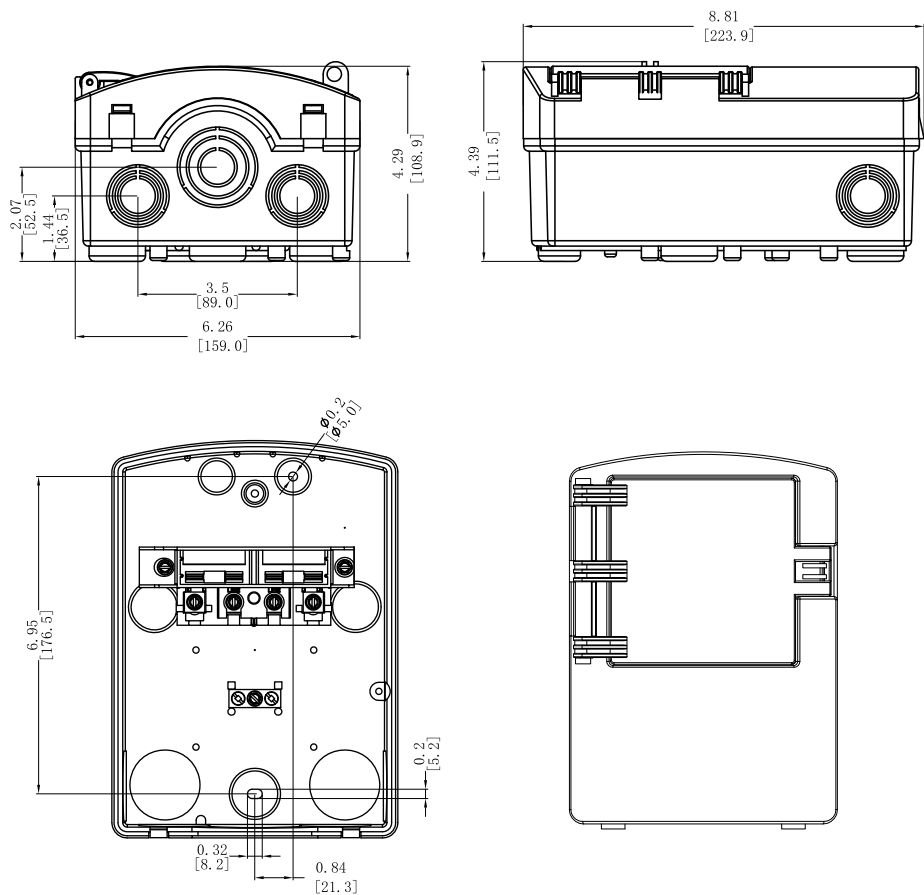


Product Data Sheet


Outline Drawings :
Disconnects - Fused Metallic (Top Open)

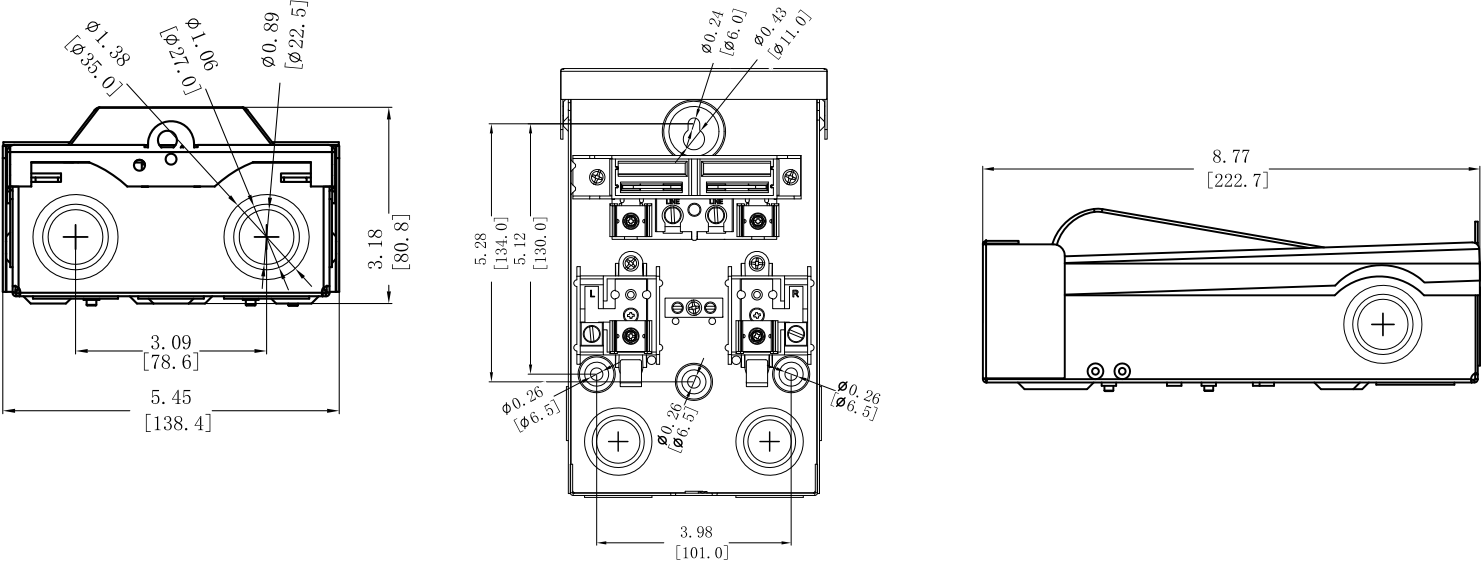

Disconnects - Non-Fused Metallic (Top Open)

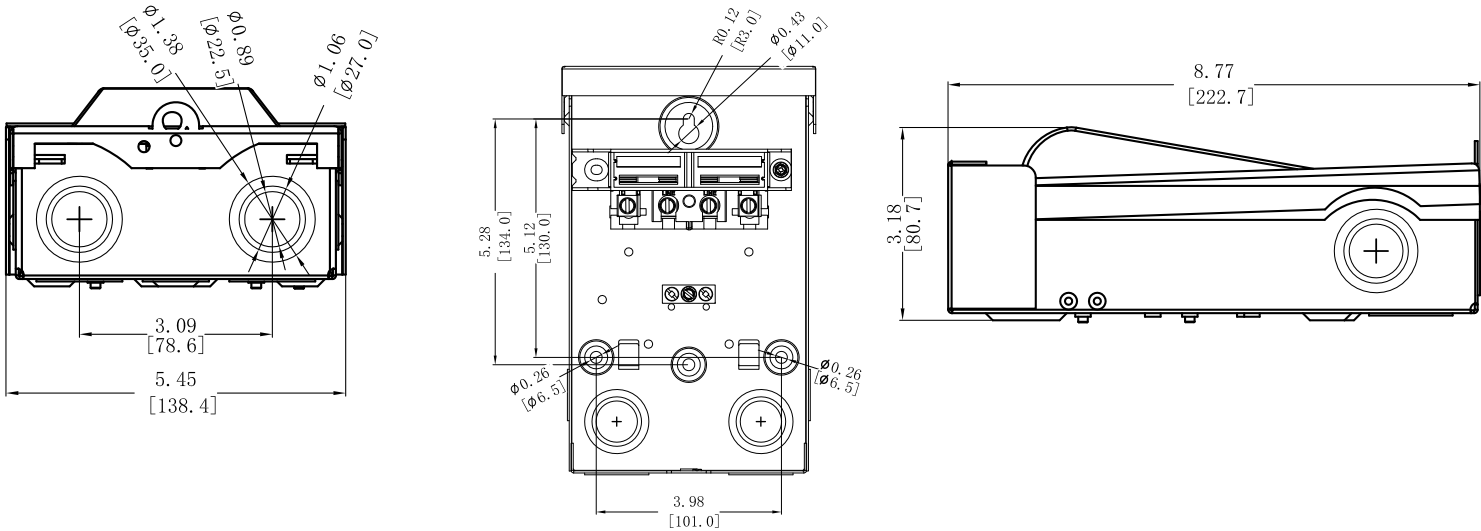

Outline Drawings :
Disconnects - Fused Metallic (Side Open)

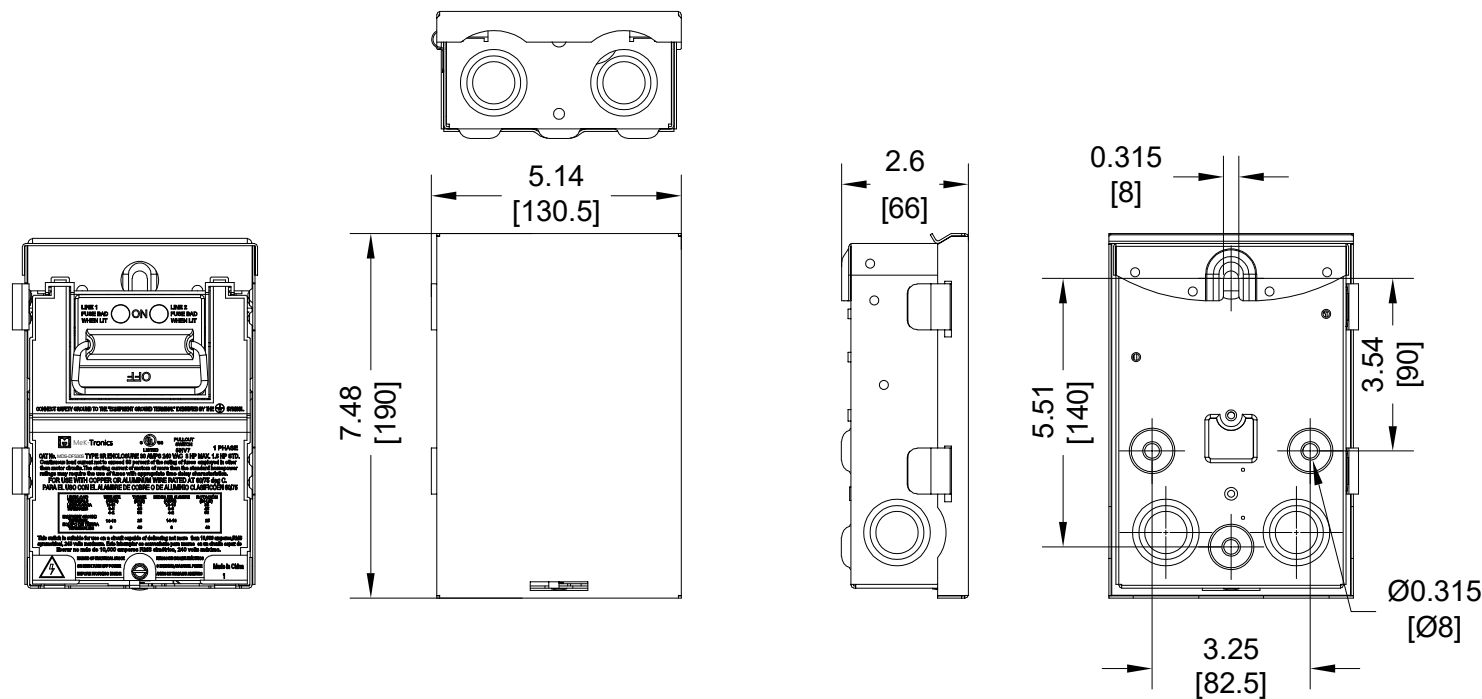

Disconnects - Non-Fused Metallic (Side Open)

