

## 1, 2 & 3 Pole Terminal Blocks

### **MTB Series**

#### **Specifications**

**Line and Load Connections** 

60 Amp Maximum rating

**Power Pole Terminations** 

Aluminum Lug and Quad .250" QC

Wire Size

#4-14 AWG

**Recommended Tightening Torque Aluminum** 

Lug: 40 in. lbs

**Quick Connects (optional)** 

Power terminals: Quad .250" QC




MTB-1P



 Molded base terminal blocks for use in commercial and industrial applications. Tested and listed in UL Standard 1059 and CSA C22.2 No. 158.

#### **Features**

- Can be flush mounted
- Quick, safe, reliable, and economical circuit connections
- Has lug and QC termination options
- Tested, UL Listed and CSA certified

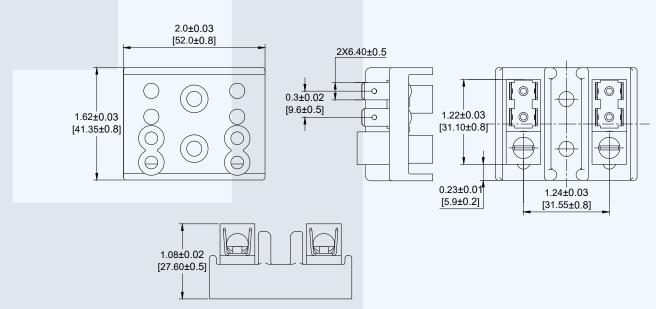





# 1, 2 & 3 Pole Terminal Blocks

### **MTB Series**

### MTB-2P

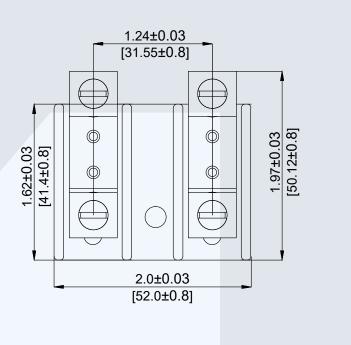



## MTB-3P

