



MeK-Tronics

1, 2 & 3 Pole Terminal Blocks

MTB Series

Specifications

Line and Load Connections

60 Amp Maximum rating

Power Pole Terminations

Aluminum Lug and Quad .250" QC

Wire Size

#4-14 AWG

Recommended Tightening Torque Aluminum

Lug: 40 in. lbs

Quick Connects (optional)

Power terminals:

Quad .250" QC




• Molded base terminal blocks for use in commercial and industrial applications. **cUL Recognized under UL Standard 1059 and CSA C22.2 No. 158 (File No. E544524).**

Features

- Can be flush mounted
- Quick, safe, reliable, and economical circuit connections
- Has lug and QC termination options
- cUL Recognized to UL 1059 and CSA C22.2 No. 158 (File No. E544524)

Dimensions (inches [mm])

MTB-1P

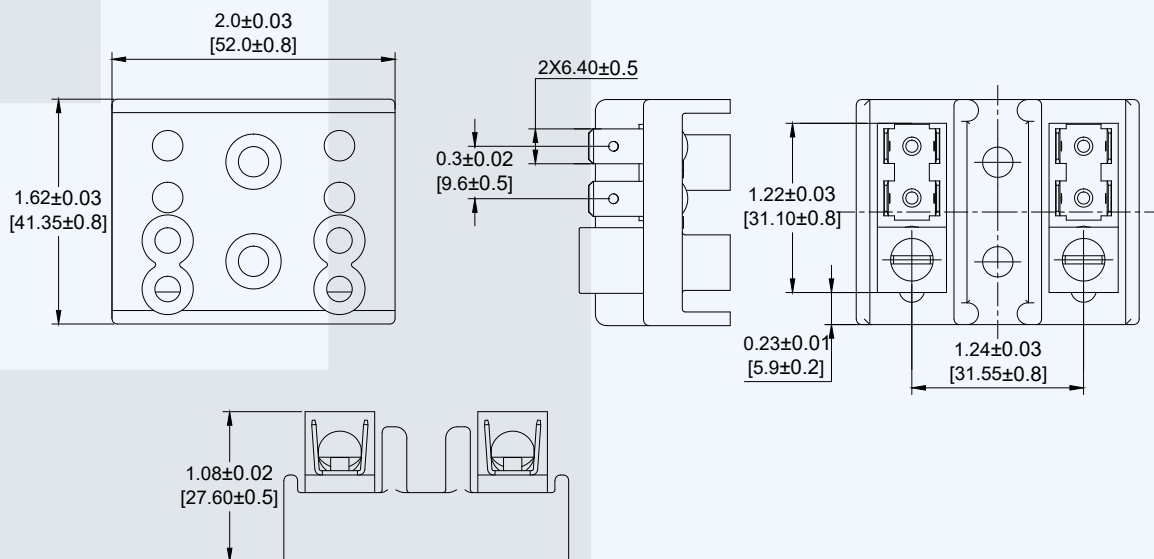





MeK-Tronics

1, 2 & 3 Pole Terminal Blocks

MTB Series

MTB-2P

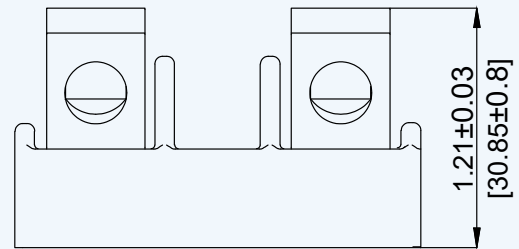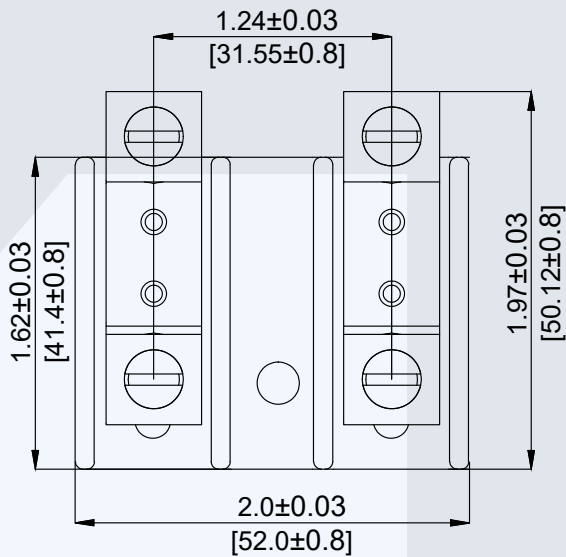

MTB-3P

