

Disconnects - Metallic

- Non-Fused Pullout
- Rated NEMA 3R for outdoor use
- Line, load, and ground terminals aligned for easy hook up with heavy wires
- Full dead front
- Knockouts accommodate three sizes (1/2", 3/4", and 1")
- Rear, bottom and side entry knockouts
- Heavy gage steel case
- Large internal wiring space
- Individually wrapped in boxes of 6
- Folding pivot locking tab
- UL approved



Disconnects - Non-metallic

- Amperage Rating: 30 and 60A
- Rated NEMA 3R for outdoor use
- Non-fused pullout
- Standard 1/4" head screw on dead front
- Great for salt air regions
- Plastic non-metallic enclosures have a single unit door and protective shield for installer convenience
- Plastic non-metallic enclosures are durable and provide excellent weather resistance
- Rear, bottom and side entry knockouts
- Individually wrapped in boxes of 6
- UL approved



Ordering Number:

MDS - D F P 60 S

Pack Code:
- = Normal factory bulk packaging
Y = Individual box packaging
A through ZZ = Customer Identification

Style:
D: With Enclosure

Protection:
F = Fused
N = Non-Fused


Enclosure Material:
S = Metallic
P = Plastic (Non-Metallic)

Current Rating:
30 = 30 Amps
60 = 60 Amps


Option Code:
S = Side Door Open (For Metallic enclosure only)

Product Data Sheet


Outline Drawings :
Disconnects - Fused Non-metallic

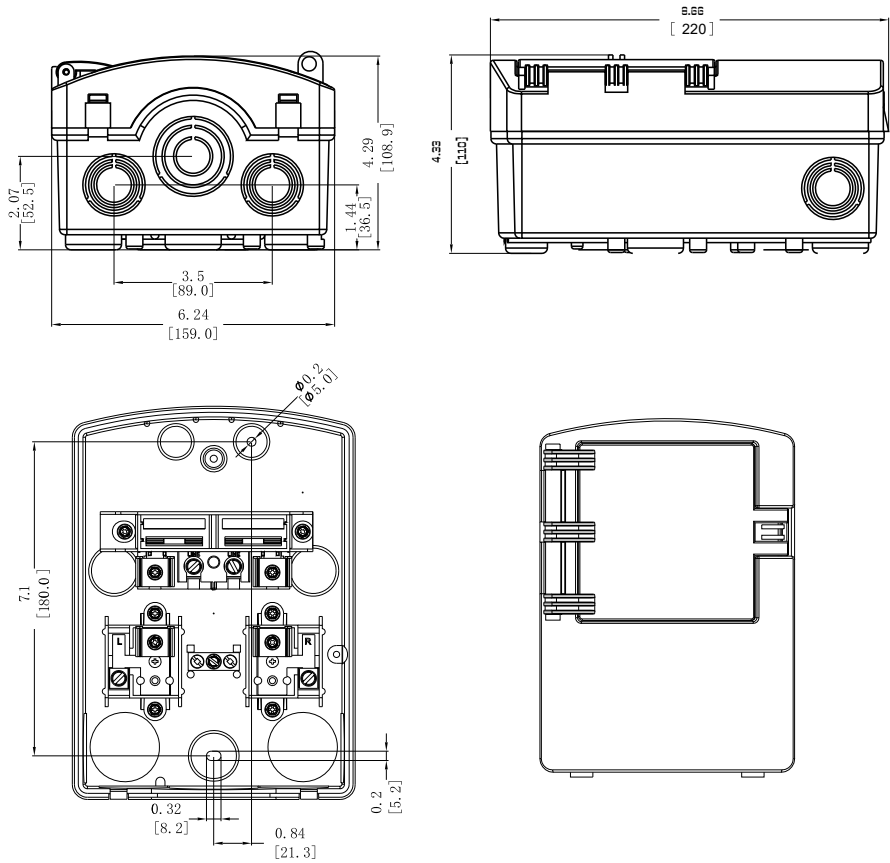


Disconnects - Non fused Non metallic

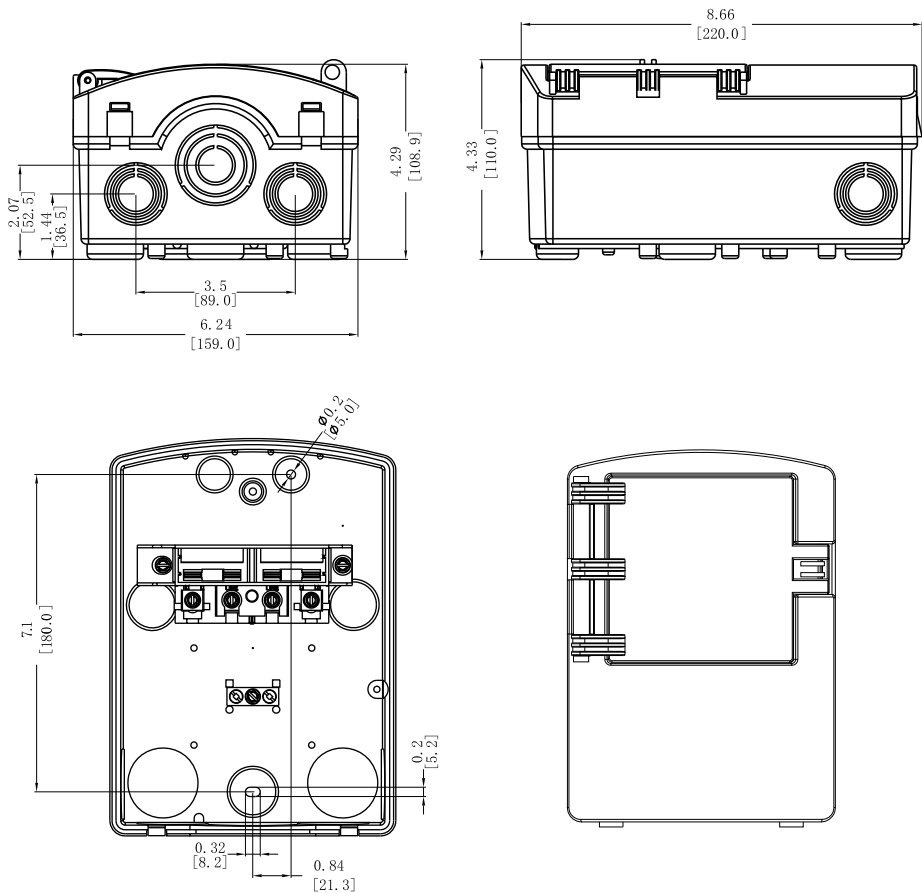


Outline Drawings :
Disconnects - Fused Metallic (Top Open)

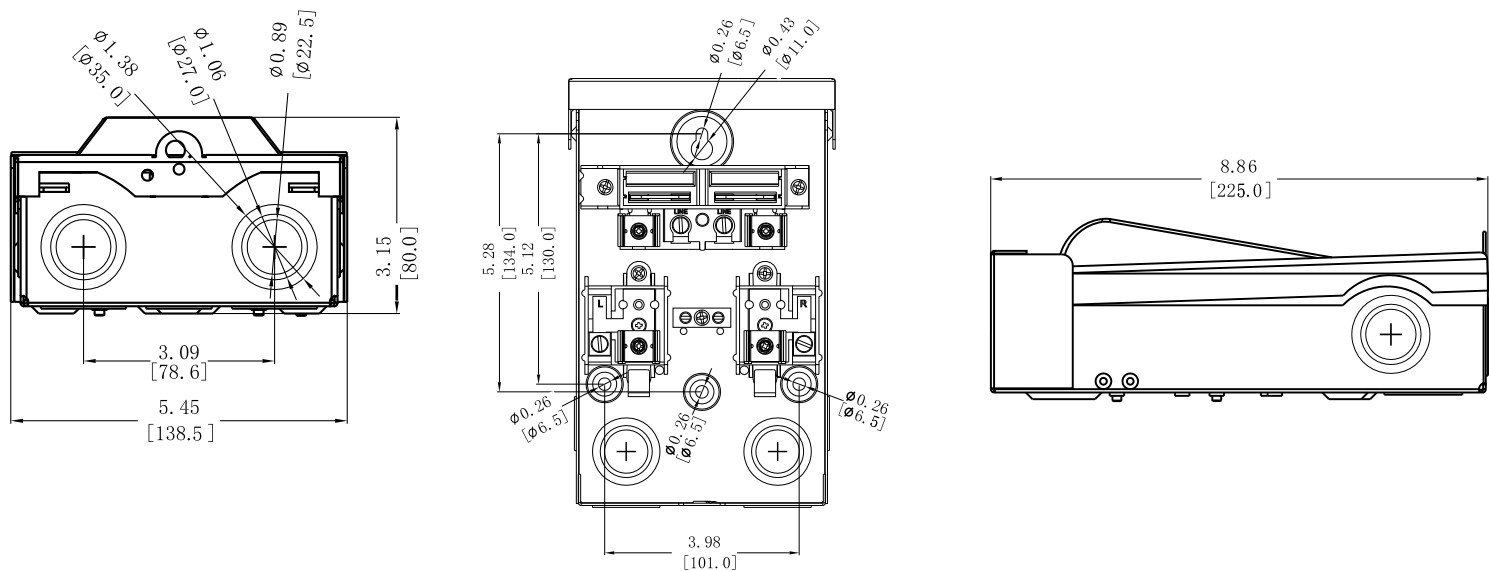

Disconnects - Non-Fused Metallic (Top Open)

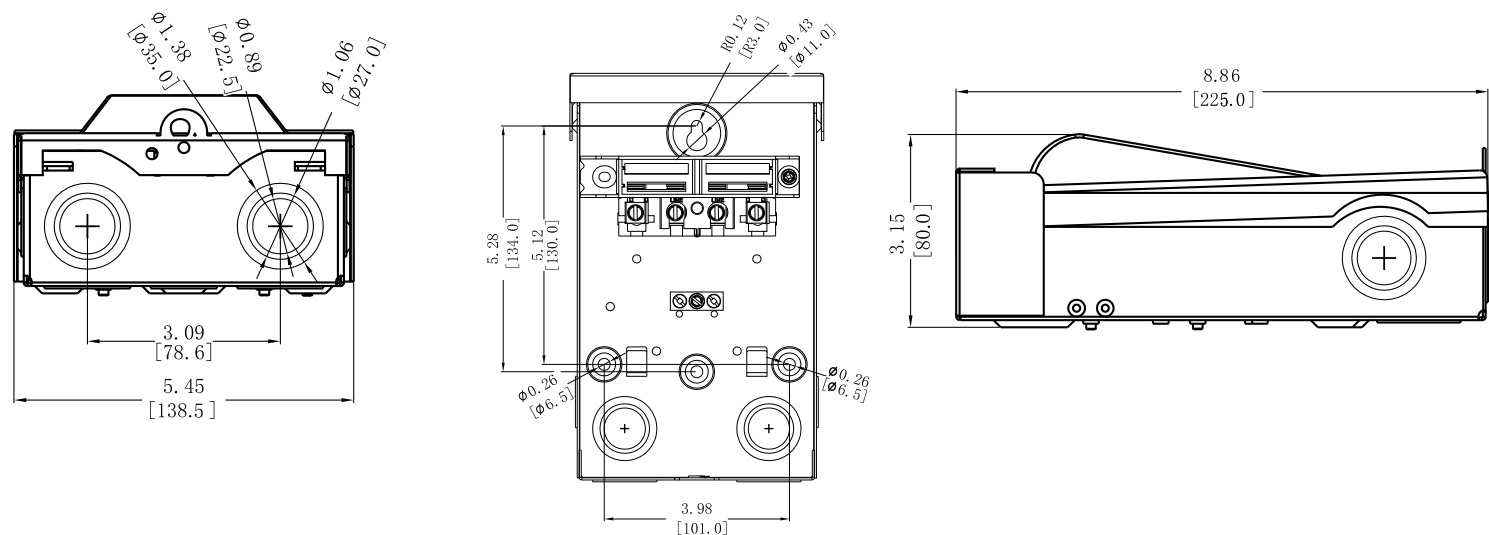

Outline Drawings :
Disconnects - Fused Metallic (Side Open)

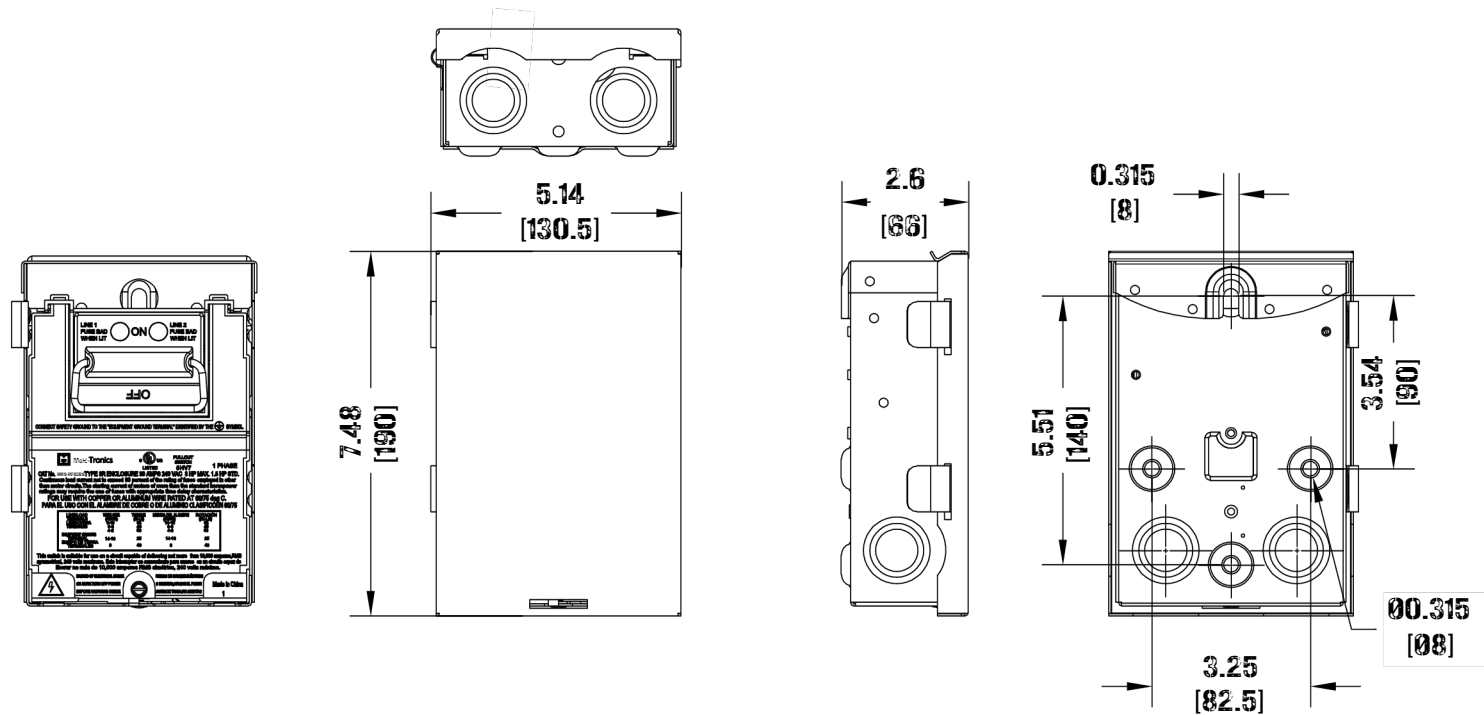

Disconnects - Non-Fused Metallic (Side Open)

